



Signature Series **ODP GENERAL PURPOSE**
115, 208 AND 230 VOLTS • 1-PHASE
FOOT MOUNT AND C-FACE
1/4 TO 10 HP

Features:

- Durable rolled steel frame construction
- NEMA Design B performance
- Meet or exceed NEMA Service Factors
- Maintenance-free double sealed ball bearings
- Continuous Duty
- Premium Class B Insulation system
- Durable, easy-to-read mylar nameplate
- UL Recognized Component Listing and CSA certified
- Warranty - 18 months from date of manufacture and 12 months from date of installation which ever period expires first.
- Made in U.S.A.



Applications:

For use where water and dust exposure is moderate. Ideally suited for use on pumps, compressors, blowers, fans and other standard industrial applications.

See page 182 for ODP Single Phase motors with built-in overload protection.

FOOT MOUNT

HP	SYN RPM	Frame	SF	Volts	Model Number	Product Number	Notes (see page 306)	Approx Shpg Wght (lbs)	List Price	Mult Sym
1/4	1800	48	1.35	115/208-230	SPD4S0.25T1C6028	LM24457		17	\$287	SP-1
	1200	56	1.35	115/208-230	SRD6S0.25T1C6028	LM24541		17	471	SP-1
1/3	3600	48	1.15	115/208-230	SPD2S0.33T1C6028	LM24467		16	236	SP-1
	1800	56	1.35	115/208-230	SRD4S0.33T1C6028	LM24570		18	301	SP-1
1/2	1200	56	1.15	115/208-230	SRD6S0.33T1C6028	LM24540		24	433	SP-1
	3600	48	1.25	115/208-230	SPD2S0.5T1C6028	LM24465		18	261	SP-1
1/2	1800	56	1.25	115/208-230	SRD4S0.5T1C6028	LM24551		22	331	SP-1
	1200	56	1.25	115/208-230	SRD6S0.5T1C6028	LM24542		30	655	SP-1
3/4	3600	56	1.25	115/208-230	SRD2S0.75T1C6028	LM24674		21	321	SP-1
	1800	56	1.25	115/208-230	SRD4S0.75T1B6028	LM24502		26	409	SP-1
1	1200	56	1.15	115/208-230	SRD6S0.75T1C6028	LM24543		38	740	SP-1
	3600	56	1.25	115/208-230	SRD2S1T1B6028	LM24525		23	338	SP-1
1	1800	56	1.15	115/208-230	SRD4S1T1C6028	LM24580		30	446	SP-1
	1800	143T*	1.15	115/208-230	SSD4S1T1C6028	LM24675		33	499	SP-1
1 1/2	3600	56	1.15	115/208-230	SRD2S1.5T1B6028	LM24524		25	477	SP-1
	3600	143T*	1.15	115/208-230	SSD2S1.5T1C6028	LM24676		30	477	SP-1
1 1/2	1800	56H*	1.15	115/208-230	SRD4S1.5T1C6028	LM24583		40	580	SP-1
	1800	145T*	1.15	115/208-230	SSD4S1.5T1C6028	LM24687		41	552	SP-1
2	3600	56H*	1.15	115/208-230	SRD2S2T1B6028	LM24624		35	634	SP-1
	3600	145T*	1.15	115/208-230	SSD2S2T1B6028	LM24806		40	678	SP-1
2	1800	145T*	1.15	115/208-230	SSD4S2T1B6028	LM24677		49	657	SP-1
	1800	182T	1.15	115/208-230	SS182D4S2T1C6028	LM24678	D - 131515	65	673	SP-1
3	3600	182T	1.15	115/208-230	SS182D2S3T1C6028	LM24679	D - 131636	57	766	SP-1
	1800	184T	1.15	115/208-230	SS184D4S3T1C6028	LM24680	D - 131534	78	723	SP-1
5	3600	184T	1.15	208-230	SS184D2S5T1C6008	LM24681	D - 131616	78	913	SP-1
	1800	184T	1.15	208-230	SSD4S5T1B6008	LM24682	D - 131537	87	863	SP-1
7 1/2	1800	215T	1.15	208-230	SS215D4S7.5T1B6008	LM24683		118	1267	SP-1
10	1800	215T	1.15	208-230	SSD4S10T1B6008	LM24684		140	1797	SP-1

* 56H, 143T and 145T Combination Base with 12 mounting holes.

Prices and data subject to change without notice.

Product numbers in red are STOCK items.

C-FACE WITH FEET

HP	SYN RPM	Frame	SF	Volts	Model Number	Product Number	Notes (see page 306)	Approx Shpg Wght (lbs)	List Price	Mult Sym
1/2	1800	56C	1.25	115/208-230	SRD4S0.5TLC1C6028	LM24697		22	\$409	SP-1
3/4	1800	56C	1.25	115/208-230	SRD4S0.75TLC1B6028	LM24699		26	474	SP-1
1	1800	56C	1.15	115/208-230	SRD4S1TLC1C6028	LM24700		30	542	SP-1
1 1/2	1800	56HC	1.15	115/208-230	SRD4S1.5TLC1C6028	LM24701		40	579	SP-1
2	1800	145TC	1.15	115/208-230	SSD4S2TLC1B6028	LM24698		50	623	SP-1

C-FACE FOOTLESS

HP	SYN RPM	Frame	SF	Volts	Model Number	Product Number	Notes (see page 306)	Approx Shpg Wght (lbs)	List Price	Mult Sym
1/4	1800	56C	1.35	115/208-230	SRD4S0.25TLCN1C6028	LM24569		17	\$286	SP-1
1/3	3600	56C	1.15	115/208-230	SRD2S0.33TLCN1C6028	LM24688		16	249	SP-1
	1800	56C	1.35	115/208-230	SRD4S0.33TLCN1C6028	LM24571		17	328	SP-1
1/2	3600	56C	1.25	115/208-230	SRD2S0.5TLCN1C6028	LM24689		17	261	SP-1
	1800	56C	1.25	115/208-230	SRD4S0.5TLCN1C6028	LM24555		21	375	SP-1
	1200	56C	1.25	115/208-230	SRD6S0.5TLCN1C6028	LM24544		33	681	SP-1
3/4	3600	56C	1.25	115/208-230	SRD2S0.75TLCN1C6028	LM24690		19	339	SP-1
	1800	56C	1.25	115/208-230	SRD4S0.75TLCN1B6028	LM24505		25	454	SP-1
	1200	56C	1.15	115/208-230	SRD6S0.75TLCN1C6028	LM24691		37	761	SP-1
1	3600	56C	1.25	115/208-230	SRD2S1TLCN1B6028	LM24526		24	358	SP-1
	1800	56C	1.15	115/208-230	SRD4S1TLCN1C6028	LM24586		29	479	SP-1
	1800	143TC	1.15	115/208-230	SSD4S1TLCN1C6028	LM24692		32	520	SP-1
1 1/2	3600	56C	1.15	115/208-230	SRD2S1.5TLCN1B6028	LM24523		26	497	SP-1
	1800	56HC	1.15	115/208-230	SRD4S1.5TLCN1C6028	LM24587		39	580	SP-1
2	3600	56HC	1.15	115/208-230	SRD2S2TLCN1B6028	LM24527		35	650	SP-1
	3600	145TC	1.15	115/208-230	SSD2S2TLCN1B6028	LM24693		40	657	SP-1
	1800	56C	1.15	115/208-230	SRD4S2TLCN1B6028	LM24507		45	654	SP-1
	1800	145TC	1.15	115/208-230	SSD4S2TLCN1B6028	LM24694		50	658	SP-1
3	1800	184TC	1.15	115/208-230	SS184D4S3TLCN1C6028	LM24695	D - 131544	85	747	SP-1
5	1800	184TC	1.15	208-230	SSD4S5TLCN1B6008	LM24696	D - 131539	94	1047	SP-1

* 56H, 143T and 145T Combination Base with 12 mounting holes.

Prices and data subject to change without notice.

Product numbers in red are STOCK items.



Signature Series **ODP GENERAL PURPOSE
OVERLOAD PROTECTION**


**115, 208 AND 230 VOLTS • 1-PHASE
FOOT MOUNT
1/4 TO 2 HP**

Features:

- Built-in thermal overload protection
- Durable rolled steel frame construction
- NEMA Design B performance
- Meet or exceed NEMA Service Factors
- Maintenance-free double sealed ball bearings
- Continuous Duty
- Premium Class B Insulation system
- Durable, easy-to-read mylar nameplate
- UL Recognized Component Listing and CSA certified
- Warranty - 18 months from date of manufacture and 12 months from date of installation which ever period expires first.
- Made in U.S.A.

Applications:

For use where water and dust exposure is moderate. Ideally suited for use on pumps, compressors, blowers, fans and other standard industrial applications where thermal overload protection is desired.

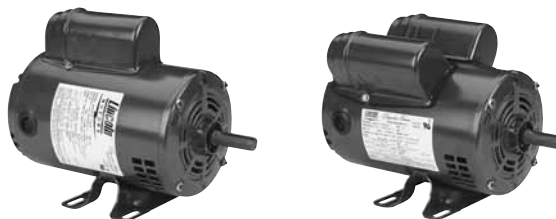

CAUTION A motor with an auto reset protector (TP2 suffix) must not be used where automatic restarting (after motor cool-down) would endanger personnel or equipment. Such applications should use a manual reset protector (TP1).

FOOT MOUNT

HP	SYN RPM	Frame	SF	Volts	Model Number	Product Number	Notes (see page 306)	Approx Shpg Wght (lbs)	List Price	Mult Sym
1/4	1800	48	1.35	115/208-230	SPD4S0.25T1C6028TP1	LM24458	ML	17	\$290	SP-1
1/3	1800	56	1.35	115/208-230	SRD4S0.33T1C6028TP1	LM24550	ML	18	342	SP-1
	1800	56	1.35	115/208-230	SRD4S0.33T1C6028TP2	LM24549	AT	18	339	SP-1
1/2	1800	56	1.25	115/208-230	SRD4S0.5T1C6028TP1	LM24553	ML	23	406	SP-1
	1800	56	1.25	115/208-230	SRD4S0.5T1C6028TP2	LM24552	AT	22	386	SP-1
3/4	1800	56	1.25	115/208-230	SRD4S0.75T1B6028TP1	LM24504	ML	25	512	SP-1
	1800	56	1.25	115/208-230	SRD4S0.75T1B6028TP2	LM24503	AT	25	472	SP-1
1	1800	56	1.15	115/208-230	SRD4S1T1C6028TP1	LM24582	ML	29	524	SP-1
	1800	56	1.15	115/208-230	SRD4S1T1C6028TP2	LM24581	AT	29	501	SP-1
1 1/2	1800	56H*	1.15	115/208-230	SRD4S1.5T1C6028TP1	LM24585	ML	40	634	SP-1
2	1800	145T*	1.15	115/208-230	SSD4S2T1B6028TP1	LM24685	ML	50	729	SP-1

* 56H, 143T and 145T Combination Base with 12 mounting holes.

Prices and data subject to change without notice.

Product numbers in red are STOCK items.