




174103.00

**NEMA 4X SCR MOTOR CONTROL
WITH SIGNAL FOLLOWER**

QUICK START GUIDE


STEP #1
REMOVE THE SIX (6) PHILLIPS SCREWS ON THE FRONT CASE.

NOTE: THE TWO SHORTER SCREWS (#6 - 32 x 2 1/2) ON THE FRONT CASE ARE USED AT HOLE LOCATIONS 5 & 6.

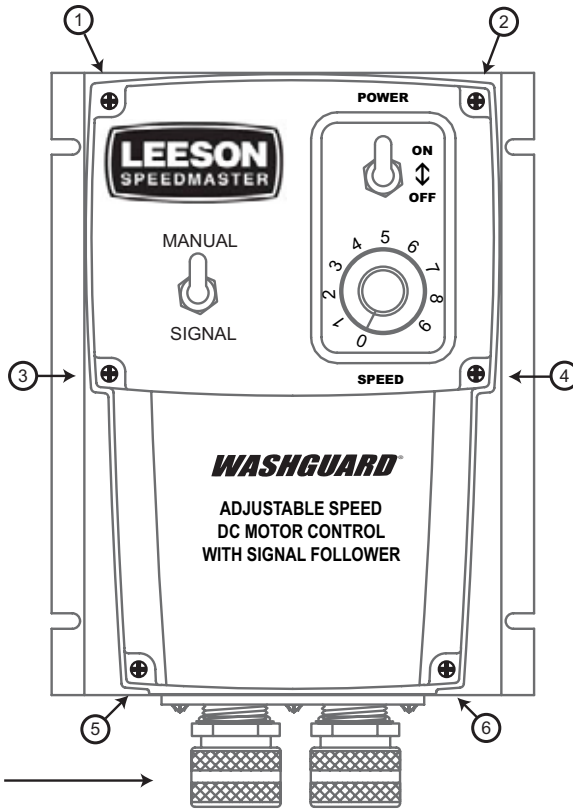

CUSTOMER SUPPLIED WATERTIGHT CORD CONNECTORS (2)

STEP #2
REMOVE THE FIVE (5) PHILLIPS SCREWS ON THE BOTTOM PLATE.

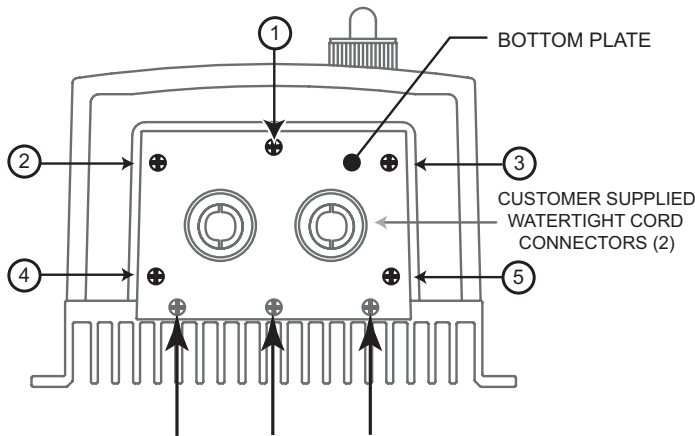


DO NOT REMOVE
THE THREE (3) SCREWS SECURING
THE BOTTOM PLATE TO THE HEATSINK

STEP #3
ASSURE THAT THE VOLTAGE SWITCH SETTINGS ARE CORRECT (SW501 & SW502)

ARMATURE VOLTAGE SWITCH (SW502)
90 or 180 VDC

AC LINE VOLTAGE SWITCH (SW501)
115 or 230 VAC

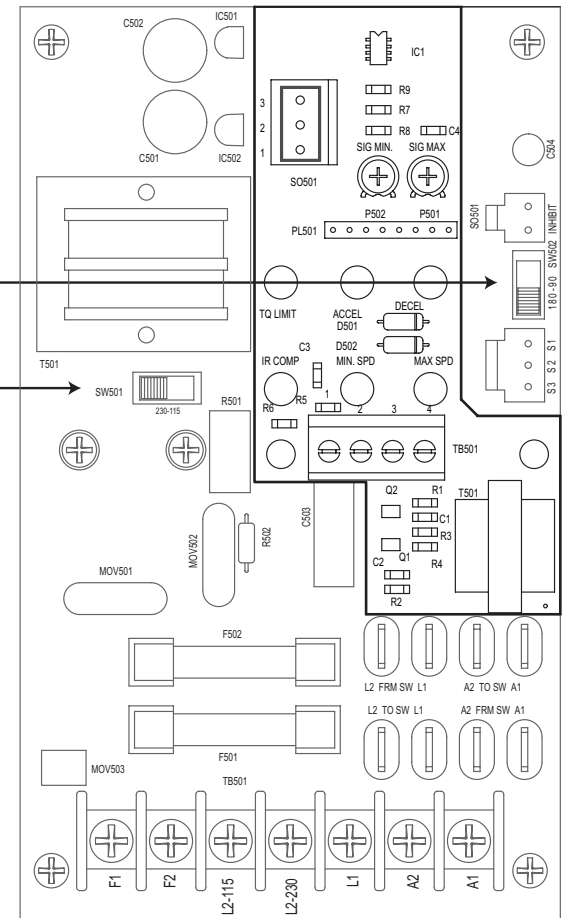

C O N N E C T I O N S

S T E P # 4


WIRE THE CONTROL
AS SHOWN THROUGH
THE CONDUIT HOLES
IN THE BOTTOM PLATE.

S T E P # 5

REPLACE SIX SCREWS
ON FRONT CASE &
FIVE SCREWS ON
BOTTOM PLATE.

FIELD OUTPUT CONNECTIONS

The field output is for shunt
wound motors only. Do not
make any connections to
F1 and F2 when using a
permanent magnet (PM) motor.

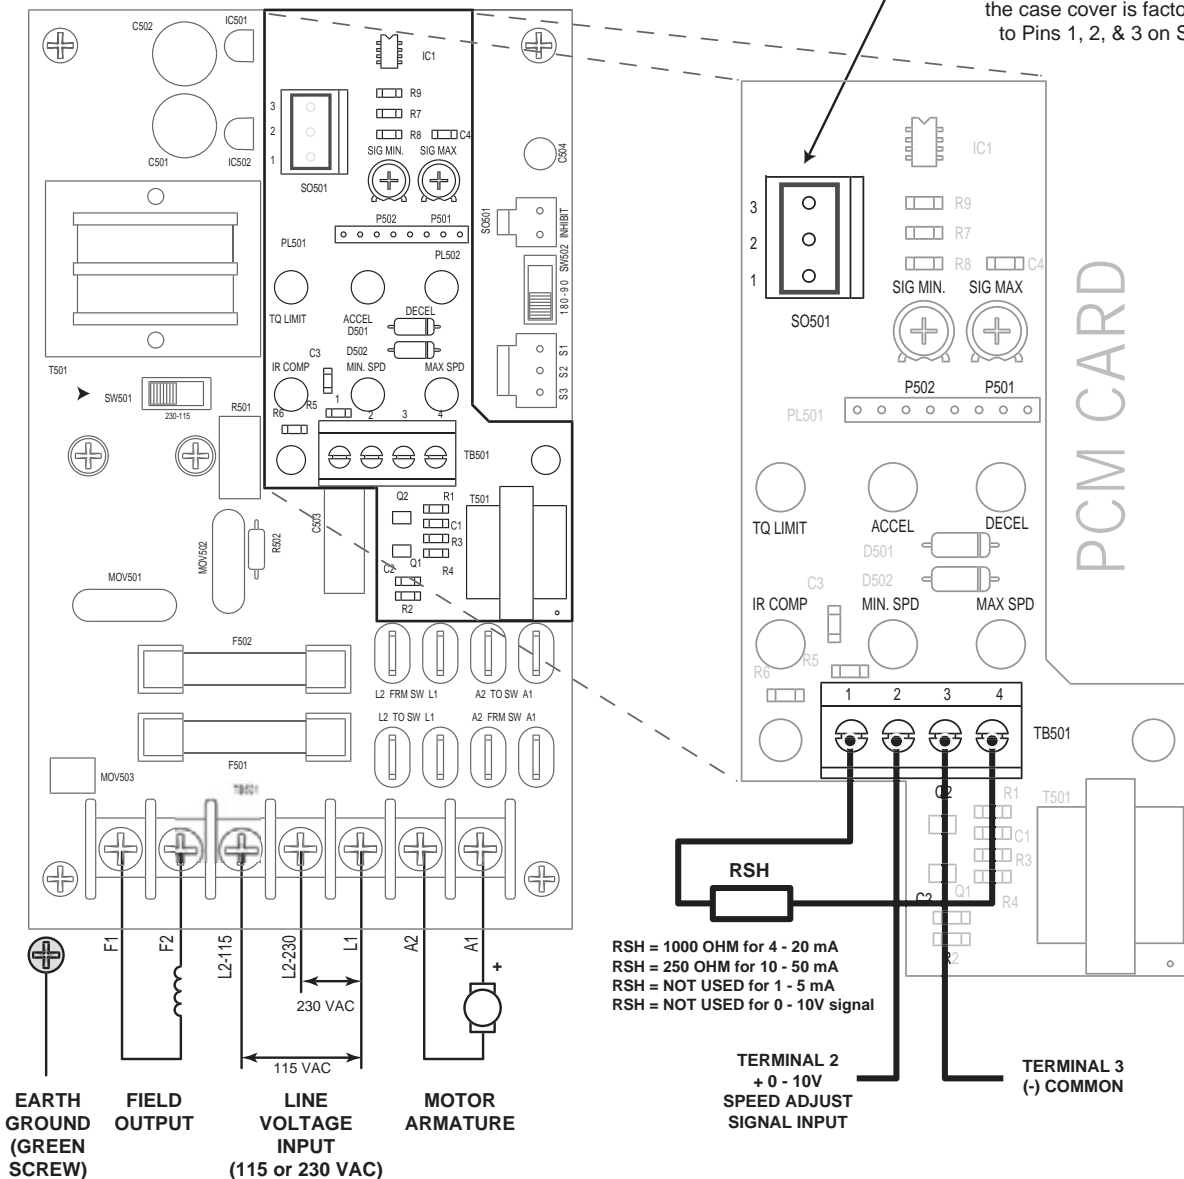

SIGNAL / MANUAL SWITCH
The signal/manual switch on
the case cover is factory-wired
to Pins 1, 2, & 3 on SO501.

O P E R A T I O N

Manual Operation

1. Set the Signal/Manual Switch to the MANUAL position.
2. Set the speed adjust dial to "0" (full CCW).
3. Apply AC line voltage.
4. Set the POWER switch to the ON position.
5. Slowly advance the speed adjust dial CW. The motor slowly accelerates as the dial is turned CW. Continue until the desired speed is reached.
6. To coast the motor to a stop, turn the speed adjust dial to "0" or set the POWER switch to the OFF position.

Signal Operation

1. Set the Signal/Manual Switch to the SIGNAL position.
2. Apply AC line voltage.
3. Set the POWER switch to the ON position.
4. Apply minimum current or voltage signal. Adjust the SIG MIN trimpot to achieve the desired minimum motor speed.
5. Apply maximum current or voltage signal. Adjust the SIG MAX trimpot to achieve the desired maximum motor speed.

L E E S O N E l e c t r i c

w w w . l e e s o n . c o m

2100 Washington Street, Grafton, WI 53024-0241, USA

Phone: 262-377-8810 Fax: 262-377-9025

Document Number: 250-0388, Revision 0; Printed in the U.S.A. - May 2004

Copyright 2003 by LEESON Electric - All rights reserved. No part of this document may be reproduced or transmitted in any form without written permission from LEESON Electric. The information and technical data in this document are subject to change without notice. LEESON Electric makes no warranty of any kind with respect to this material, including, but not limited to, the implied warranties of its merchantability and fitness for a given purpose. LEESON Electric and its Divisions assume no responsibility for any errors that may appear in this document and make no commitment to update or to keep current the information in this document. kc0504